

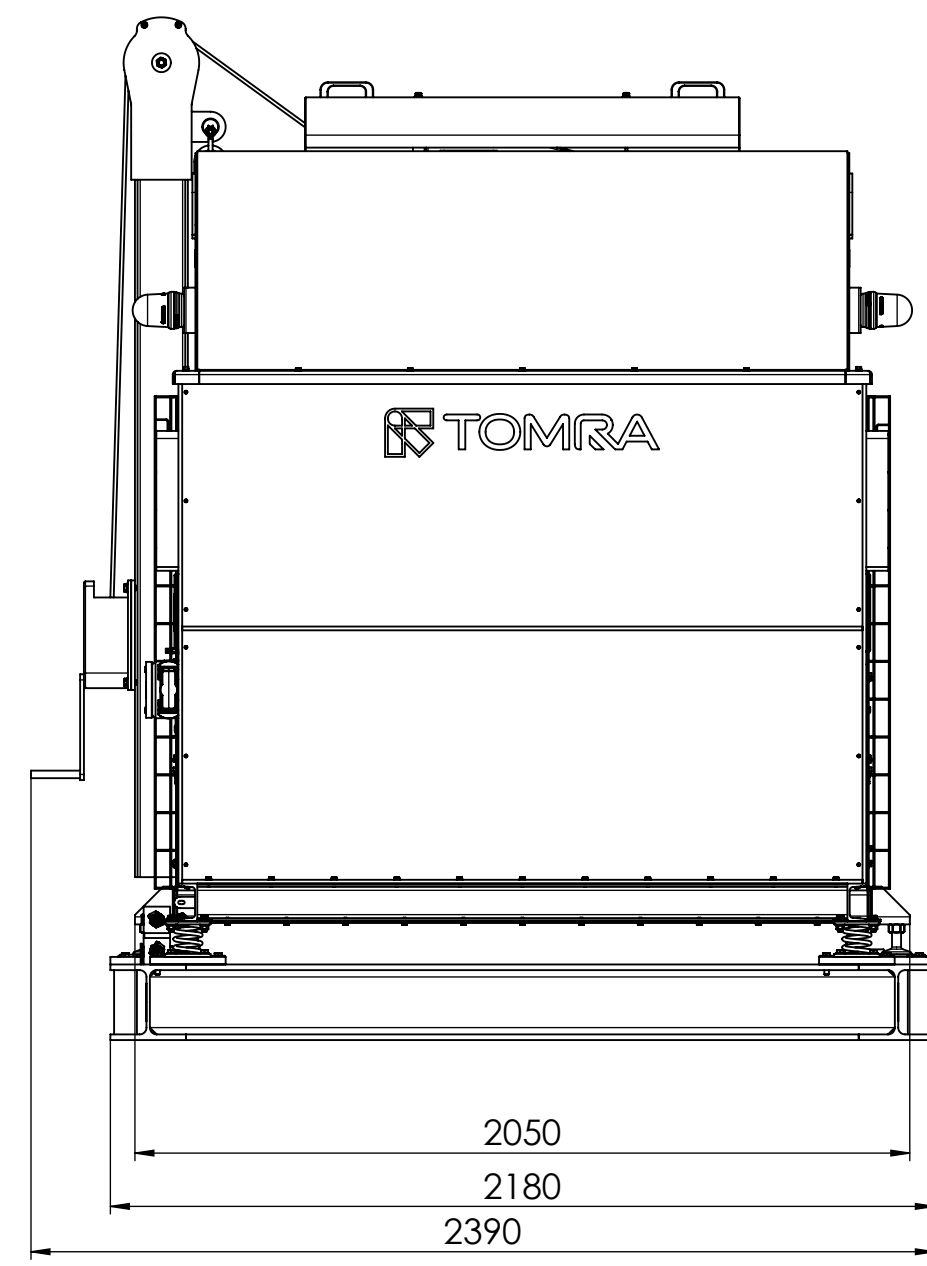
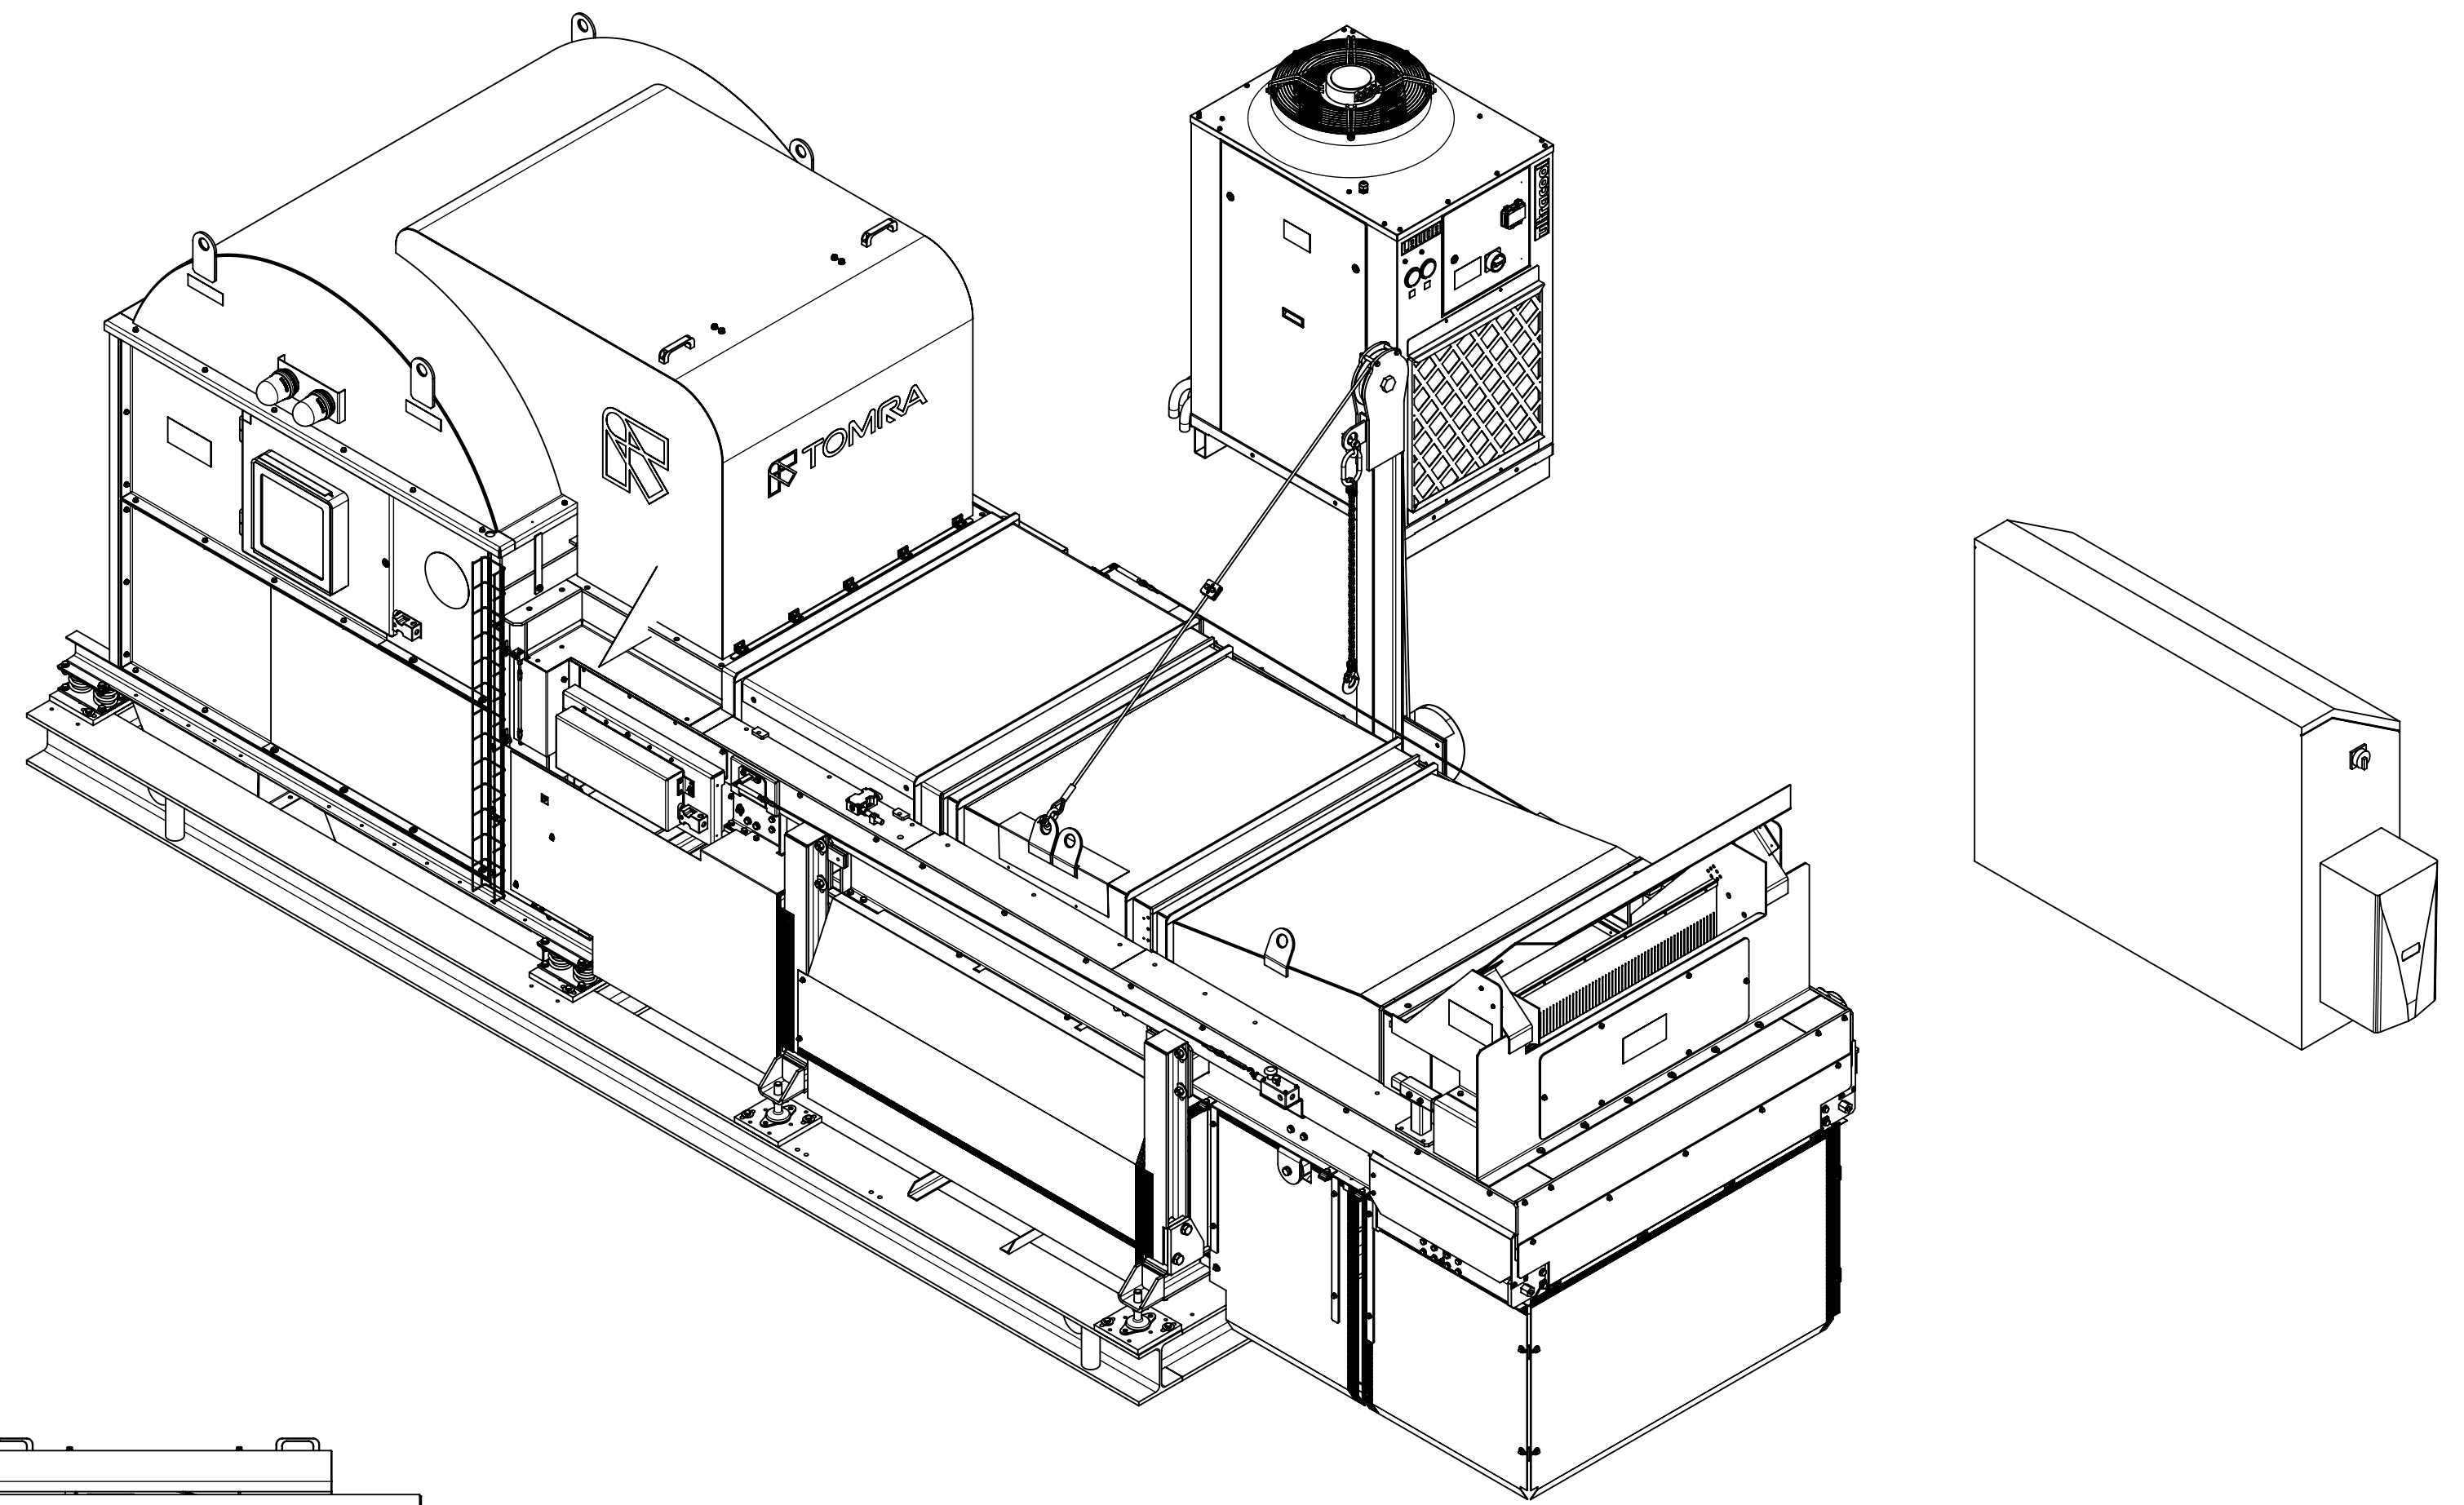


technical data	
	total
separation chamber - total	19 000 N
conveyor - total	34 000 N
base frame	10 000 N
control unit	2 500 N
cooling unit	3 500 N
<b>F total</b>	<b>69 000 N</b>

NOTE:  
Install sorter on separate structur than vibrating feeder (not included in drawing)  
to minimize vibrations from vibrating feeder and alike equipment

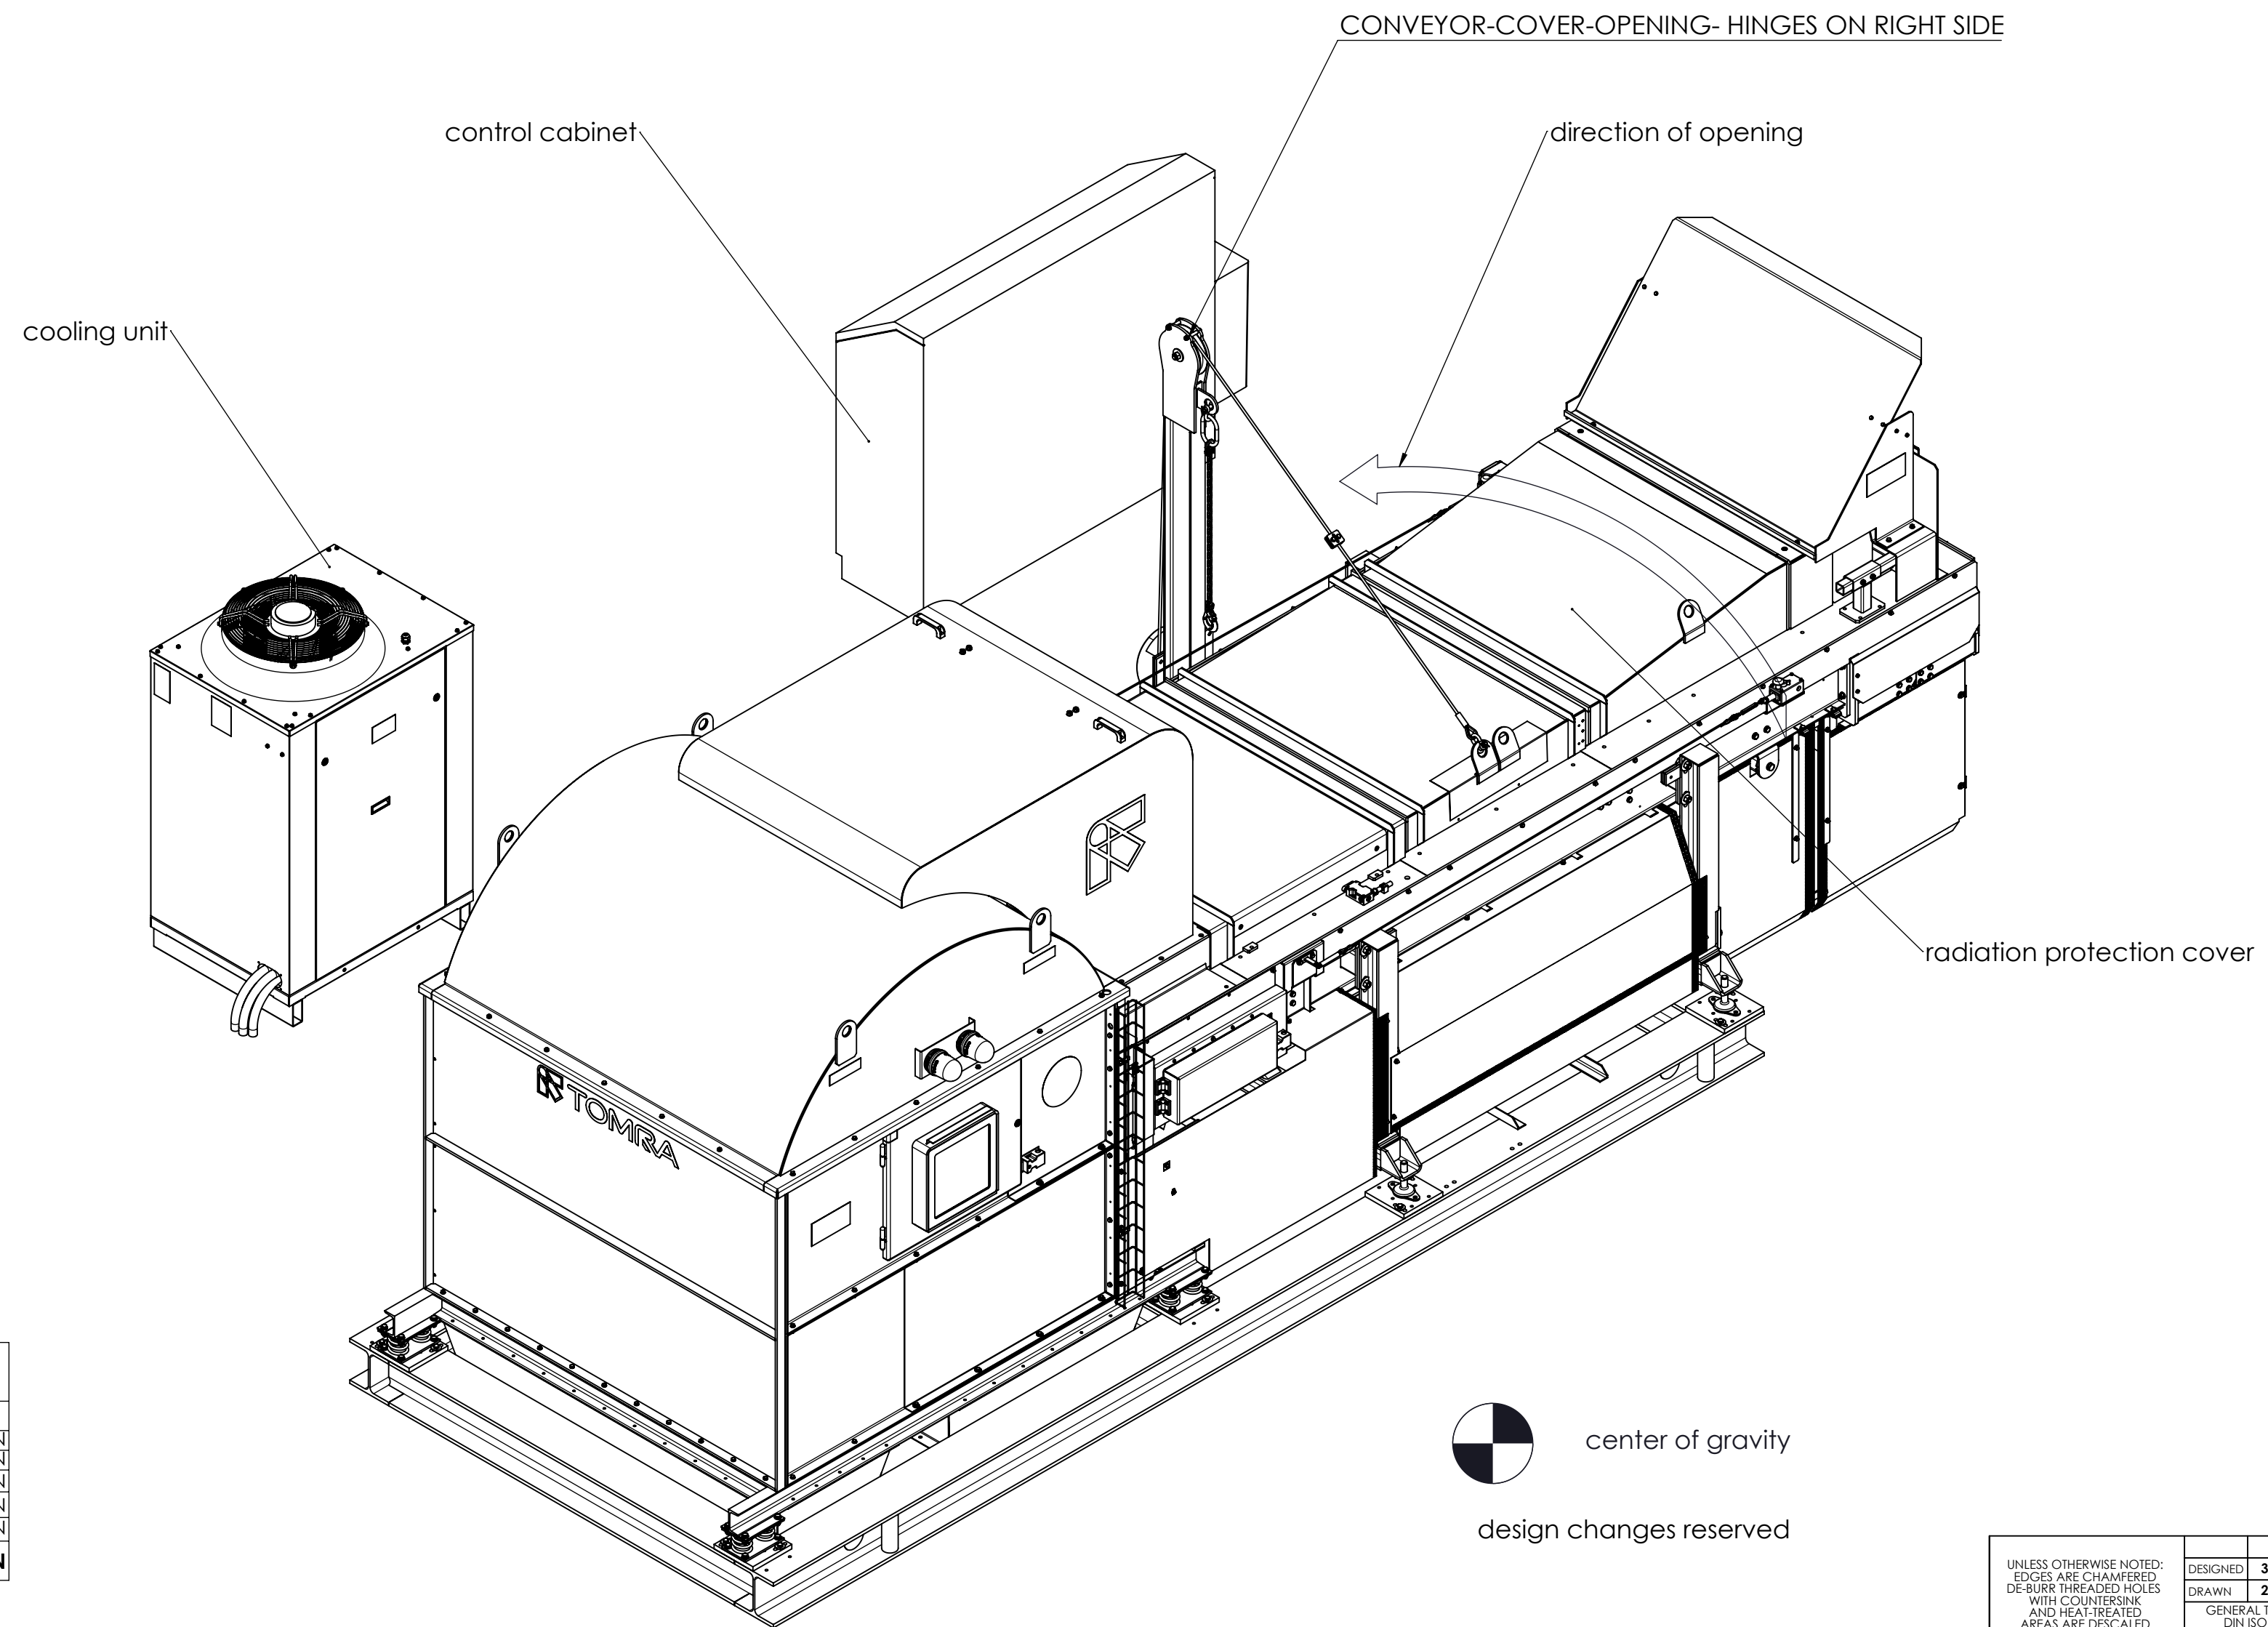

X (1 : 2)

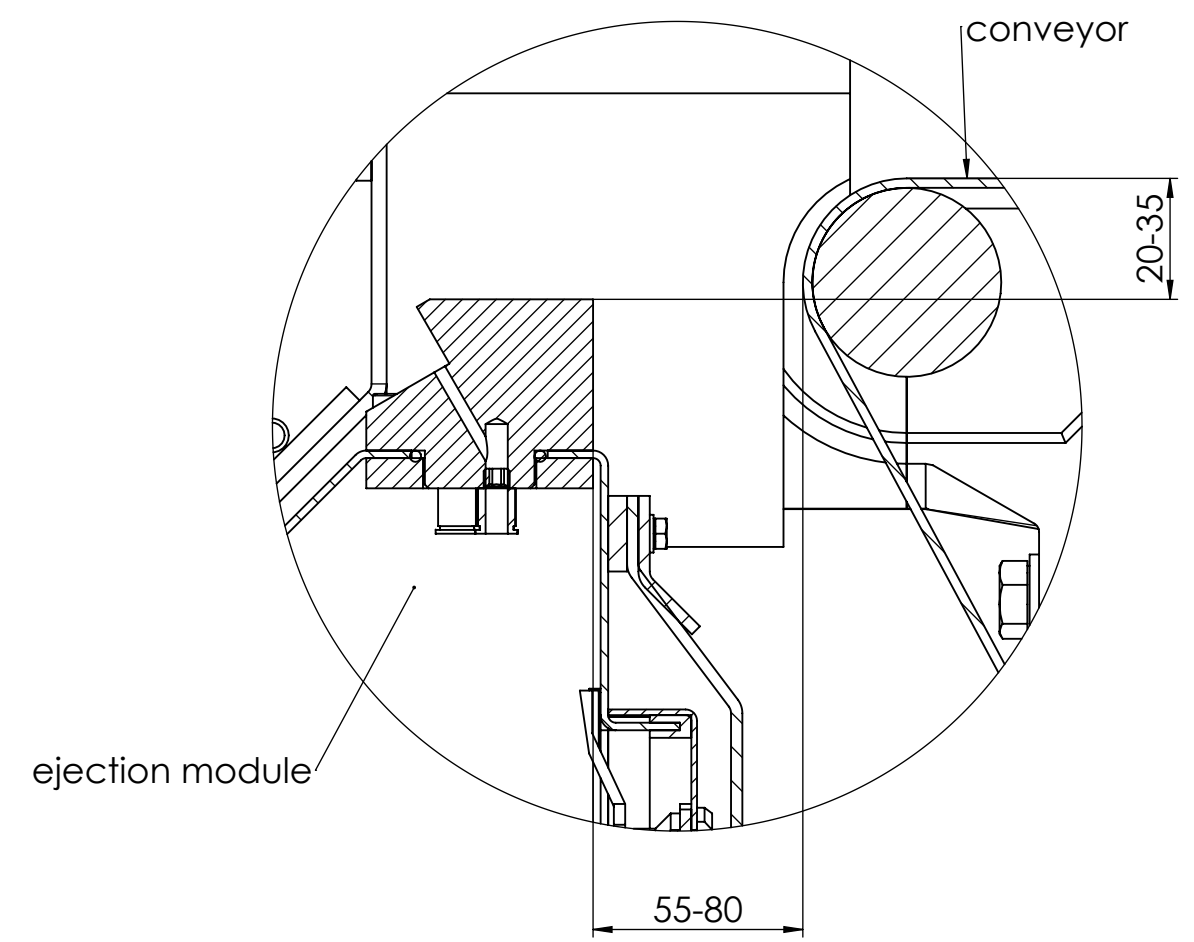

design changes reserved

#### MAIN MEASUREMENTS

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN PARENTHESES ARE IN INCHES DIMENSIONS IN PARENTHESES ARE IN INCHES DIMENSIONS IN PARENTHESES ARE IN INCHES	DATE	30.08.2018	NAME	AKHMET	SURFACE FINISH	+
	DESIGNED	30.08.2018	APPROVED	AKHMET	CONTROL	+
	DRAWN	24.05.2019	APPROVED	AKHMET	BASE MATERIAL	+
	DESCRIPTION	X-TRACT[XRT][X4-1200][B][V01].				
TOMRA		SORTING SOLUTIONS		X-TRACT[XRT][X4-1200][B][V01]		SCALE 1:20
A0		SHEET		1 OF 2		REV. 00

CONFIDENTIAL © TOMRA SORTING SOLUTIONS ACCORDING TO ISO 14001:2015  
PRINTED DRAWINGS SHOULD NOT BE SCALED

