

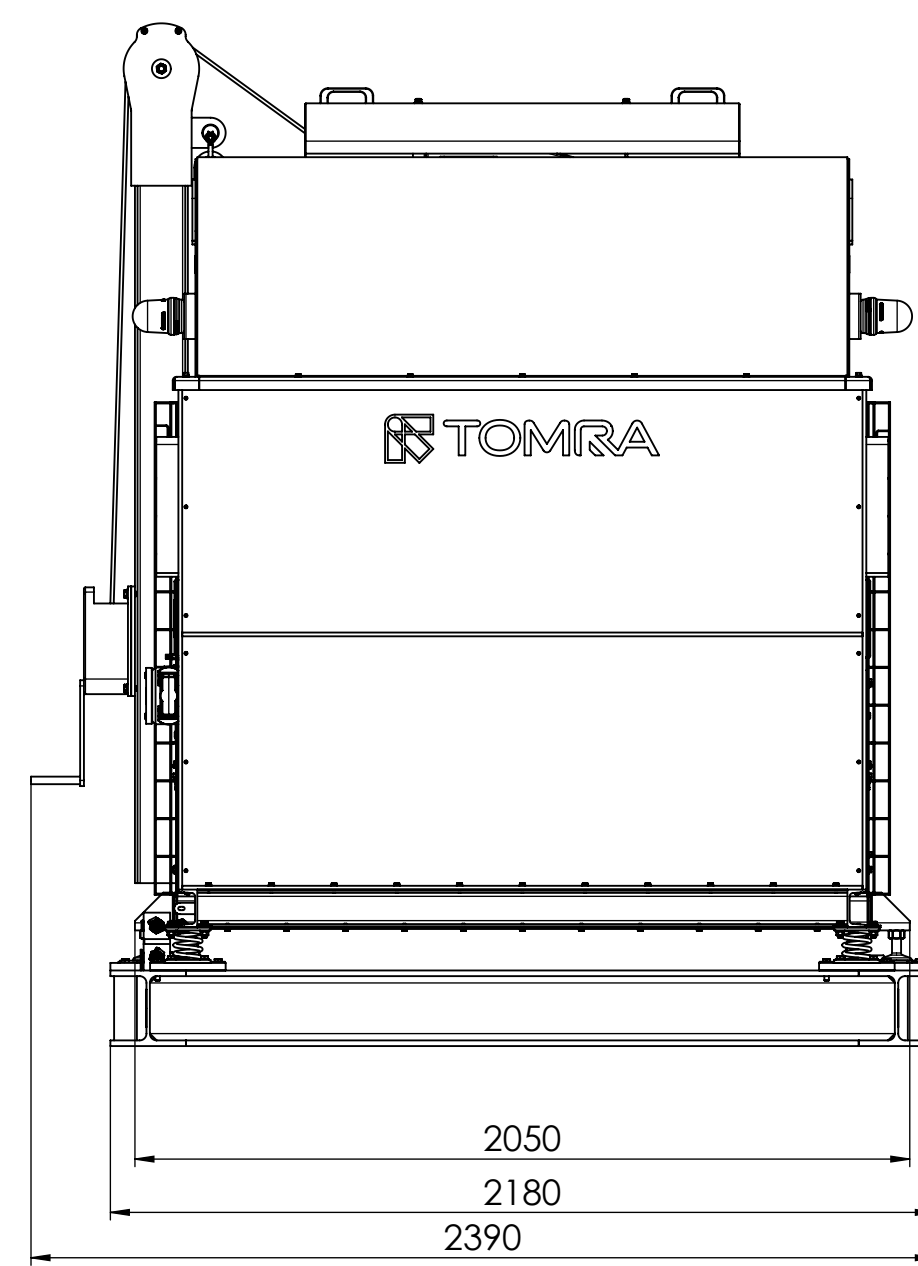
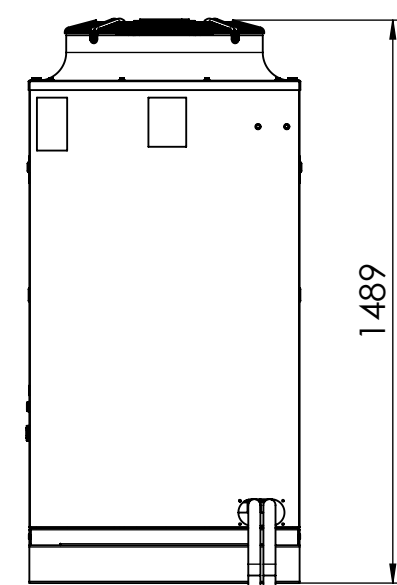
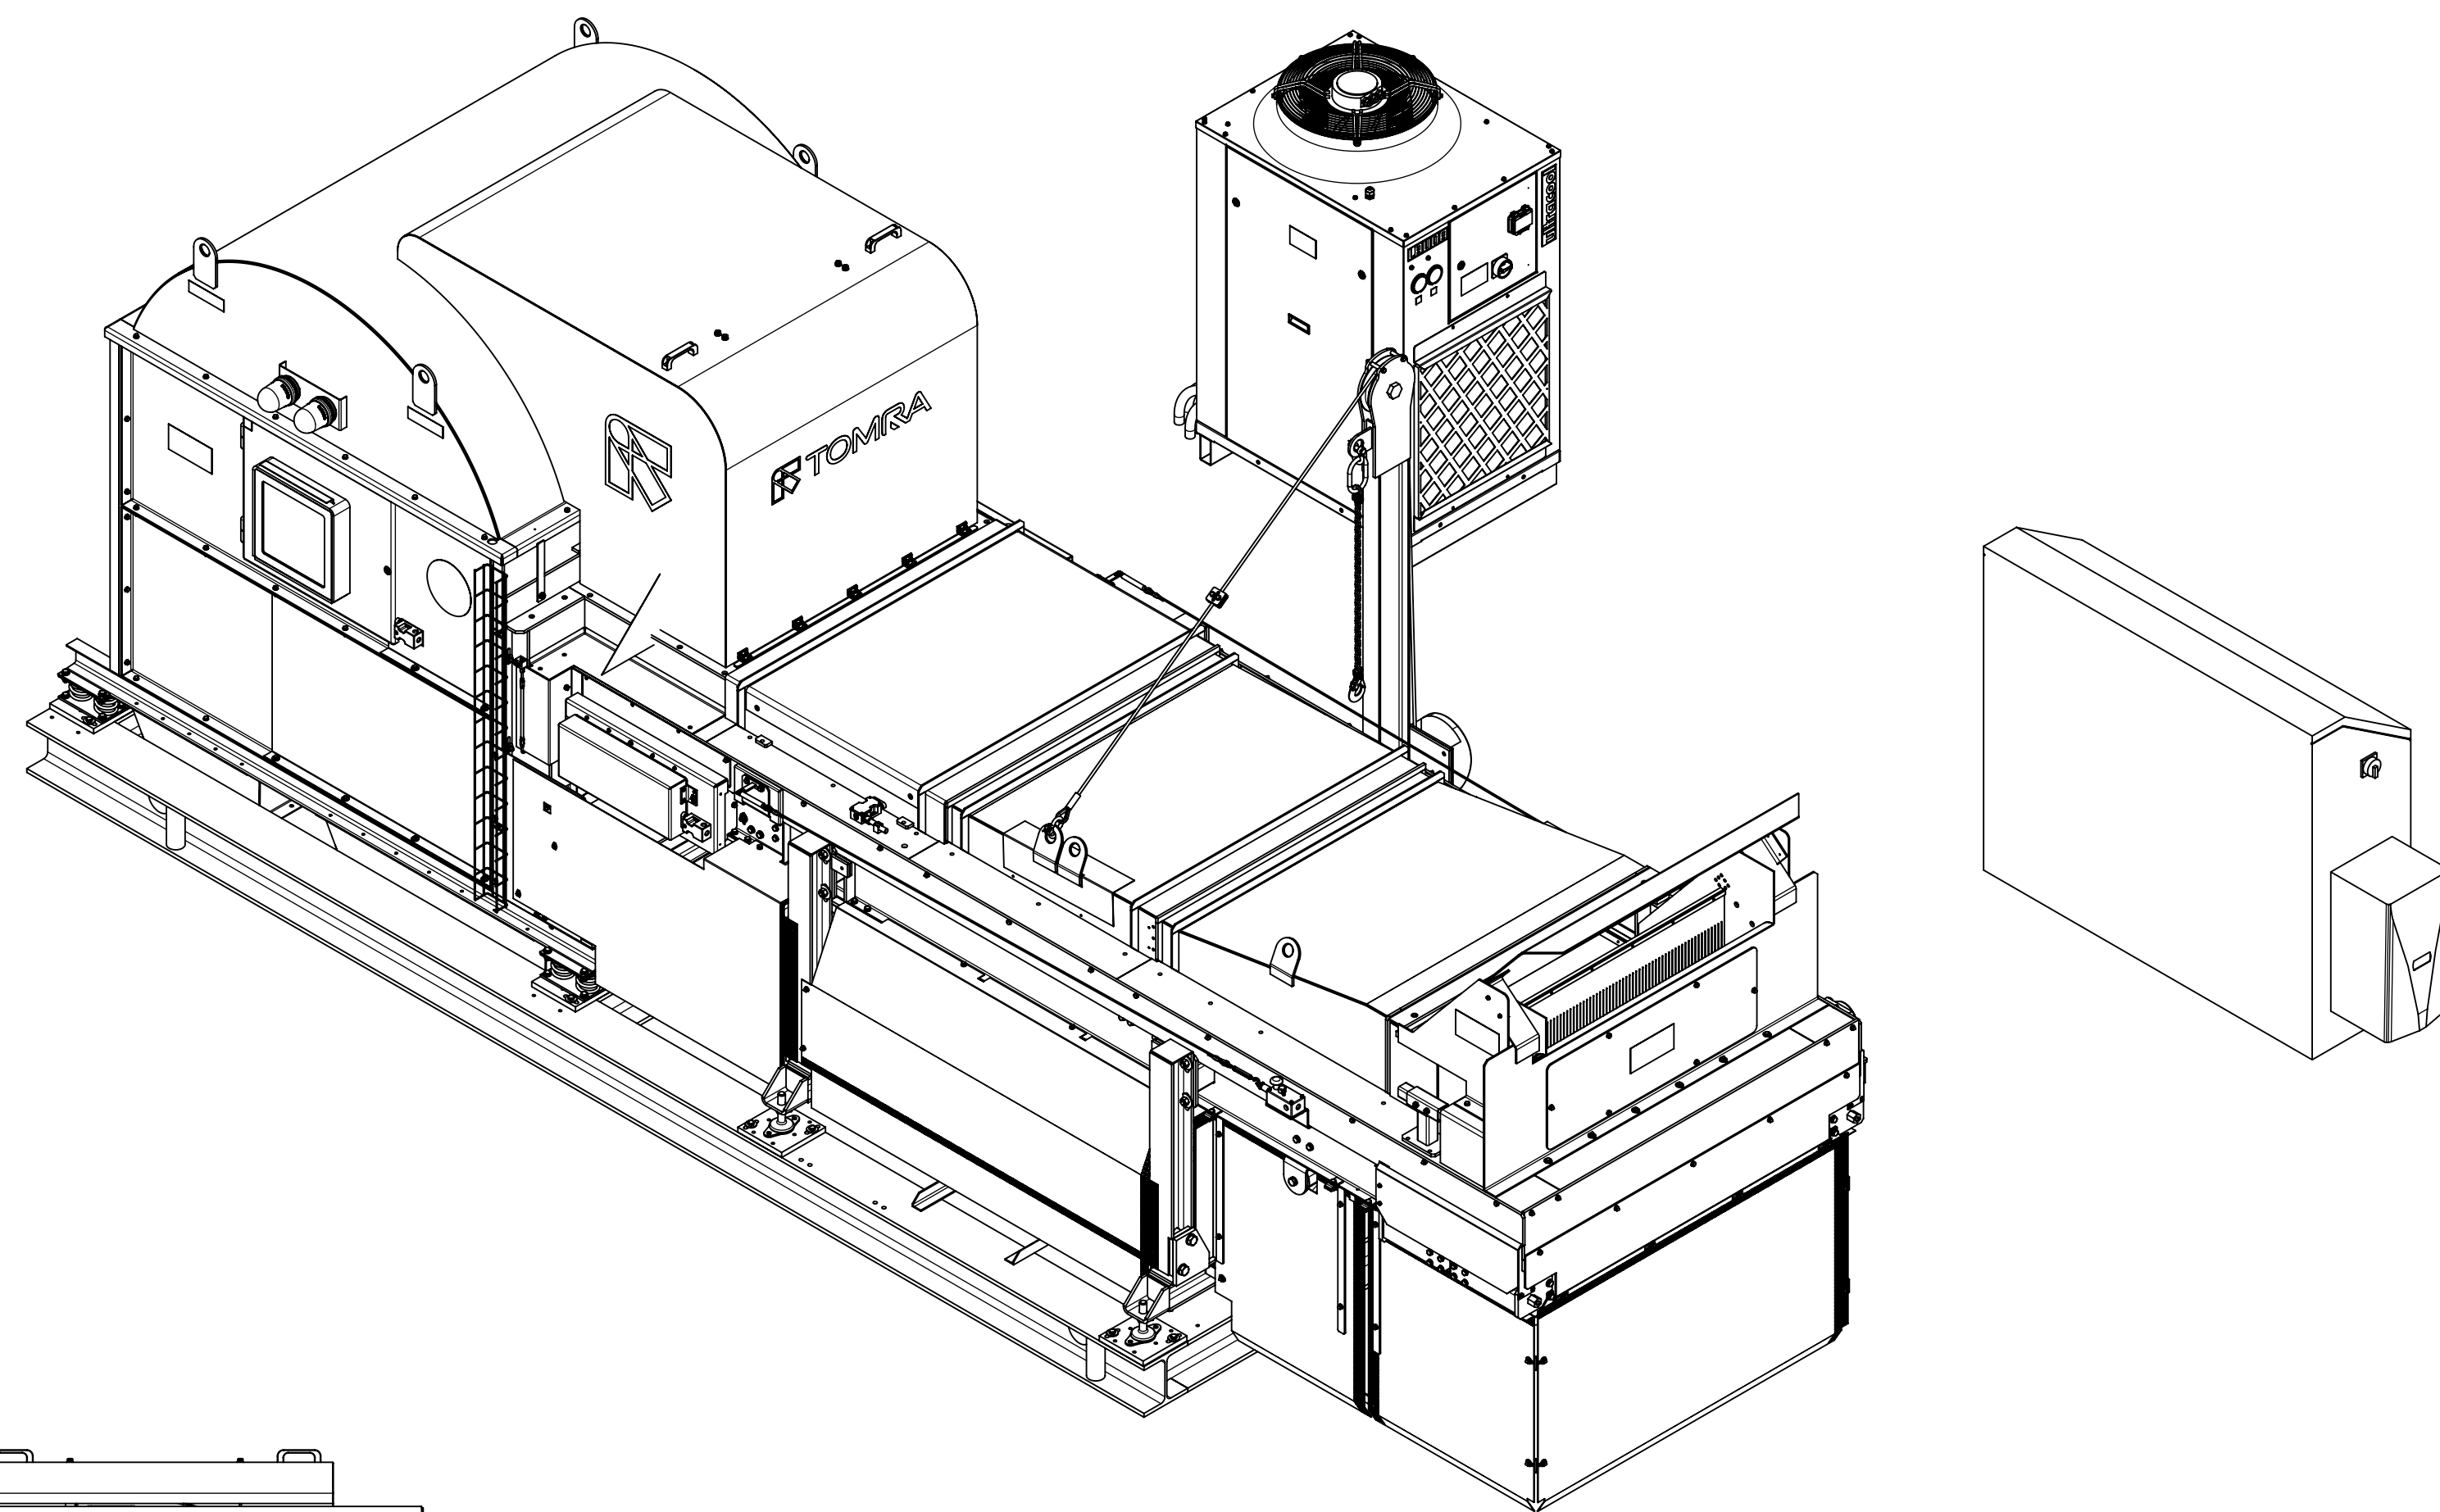


technical data	
	total
separation chamber - total	19 000 N
conveyor - total	34 000 N
base frame	10 000 N
control unit	2 500 N
cooling unit	3 500 N
F total	69 000 N

NOTE:
Install sorter on separate structur than vibrating feeder (not included in drawing)
to minimize vibrations from vibrating feeder and alike equipment


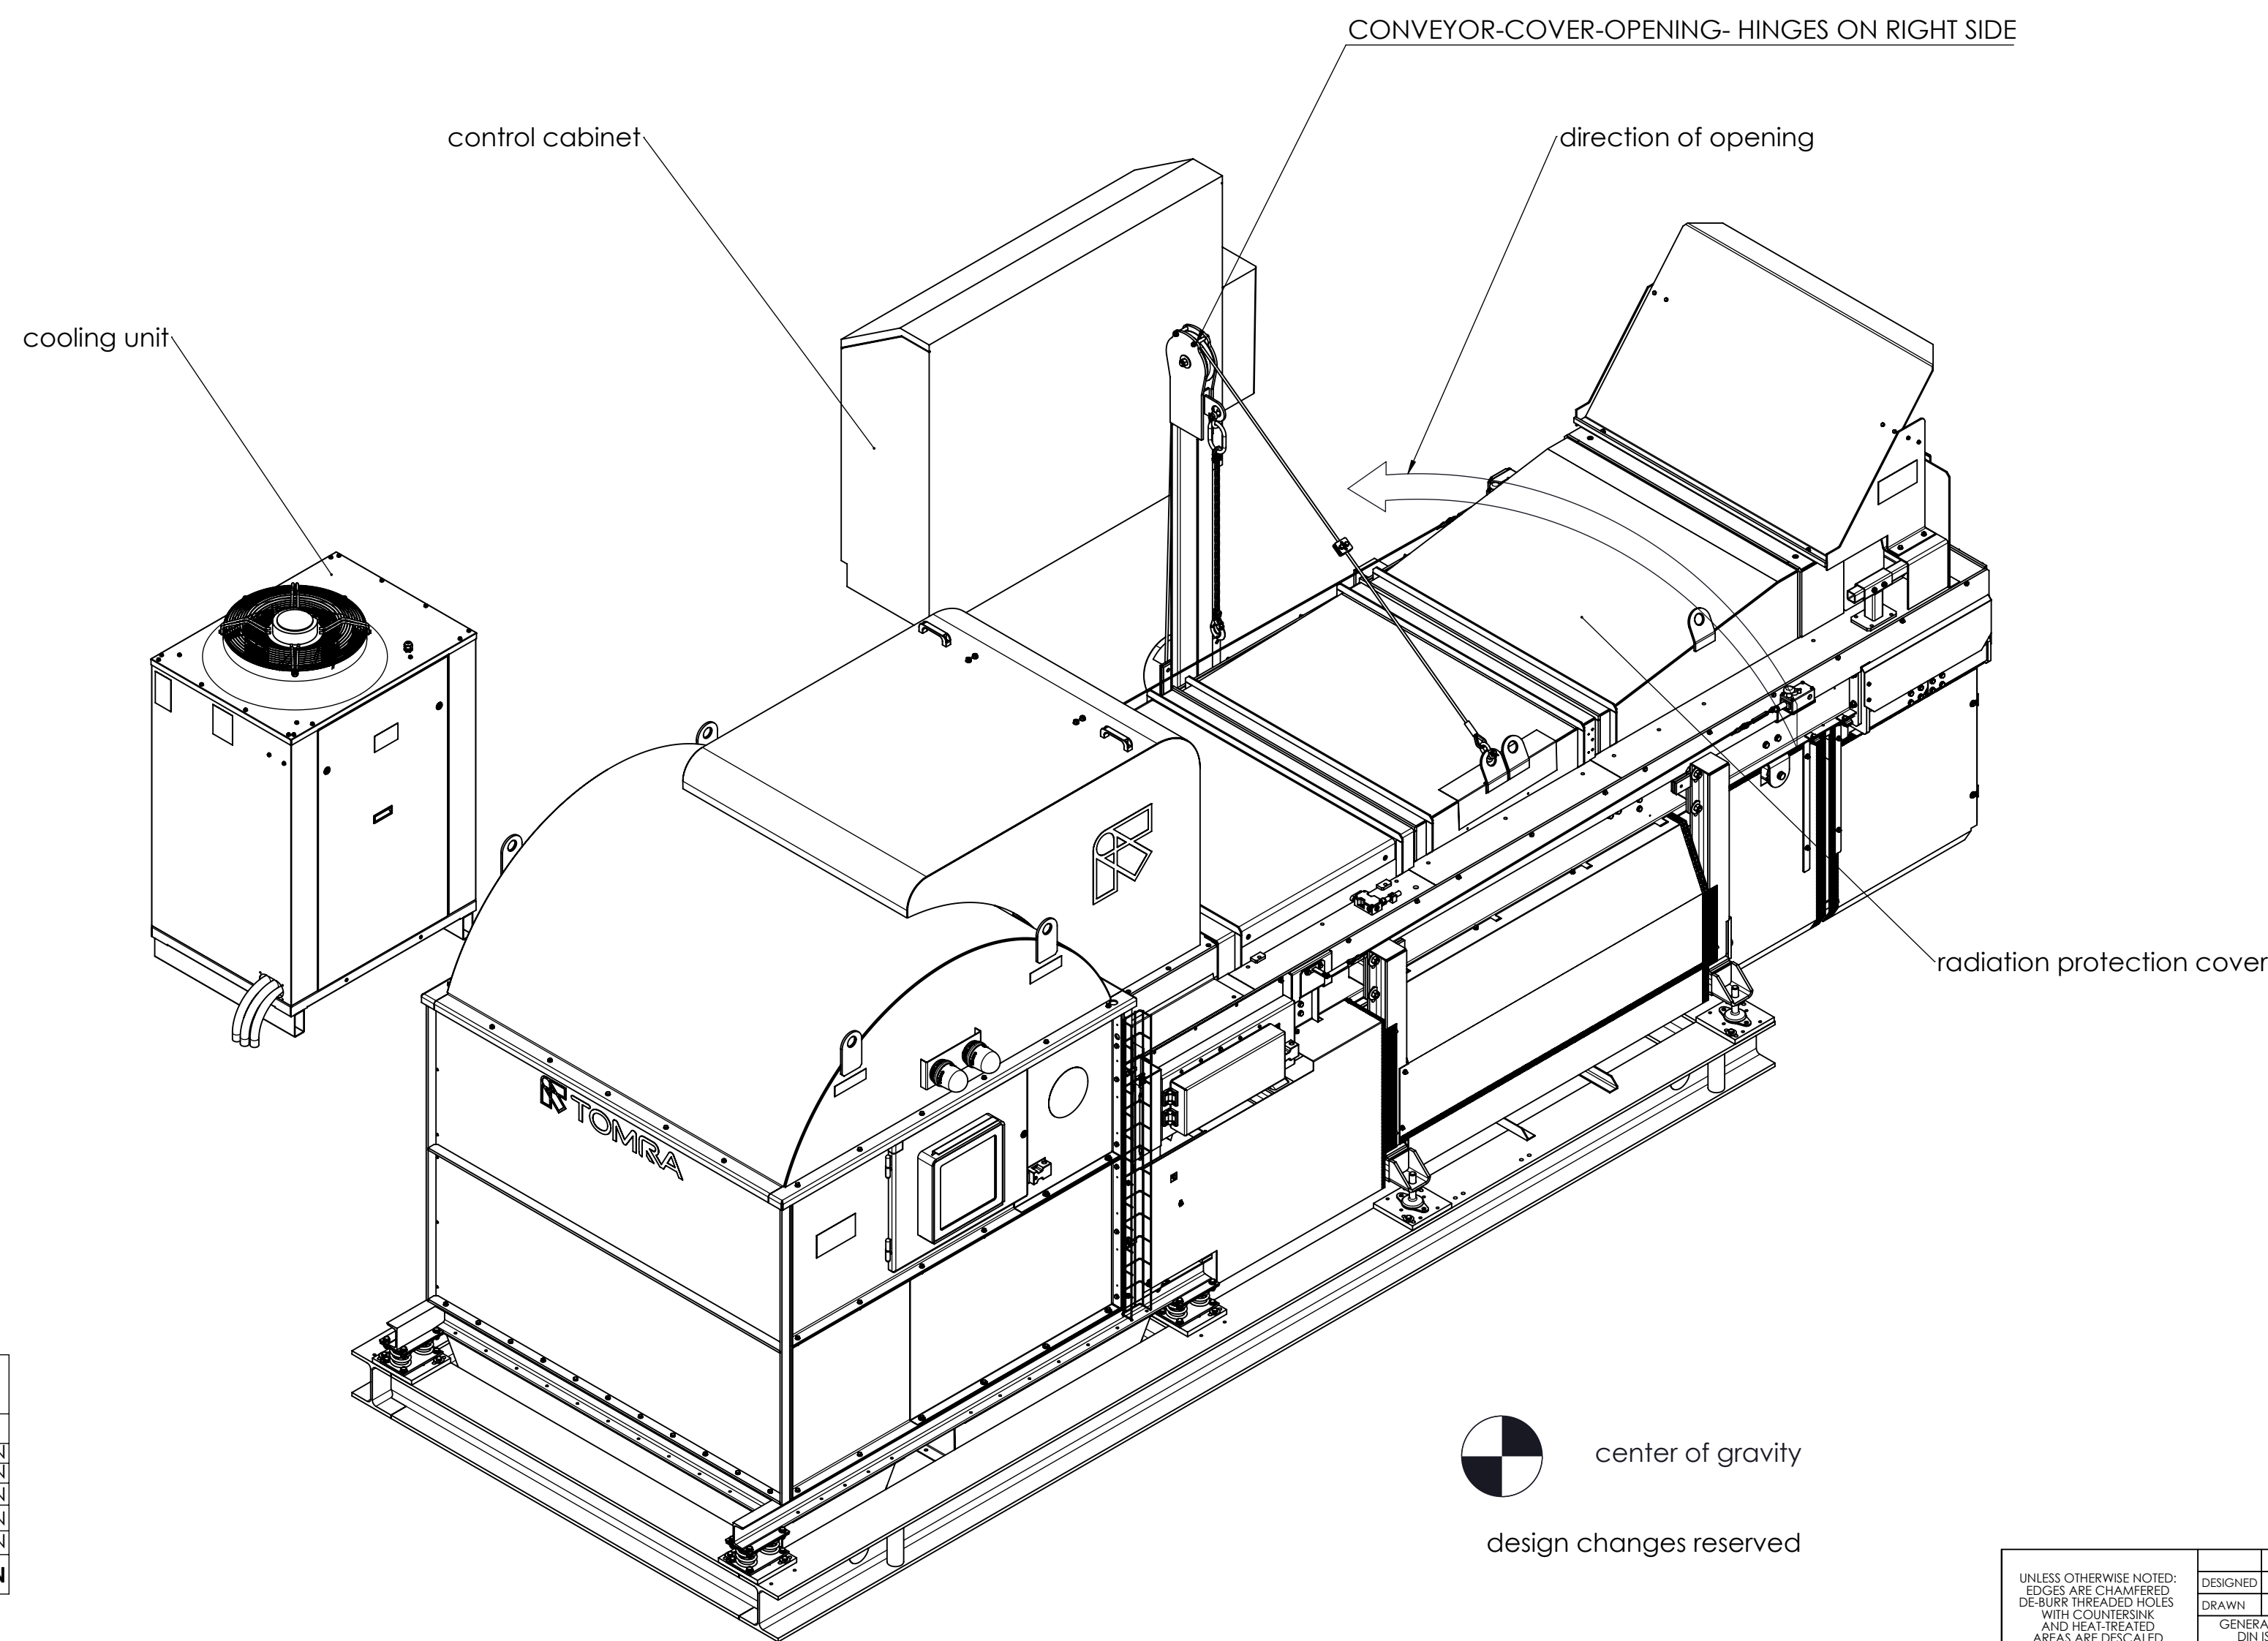


X (1 : 2)

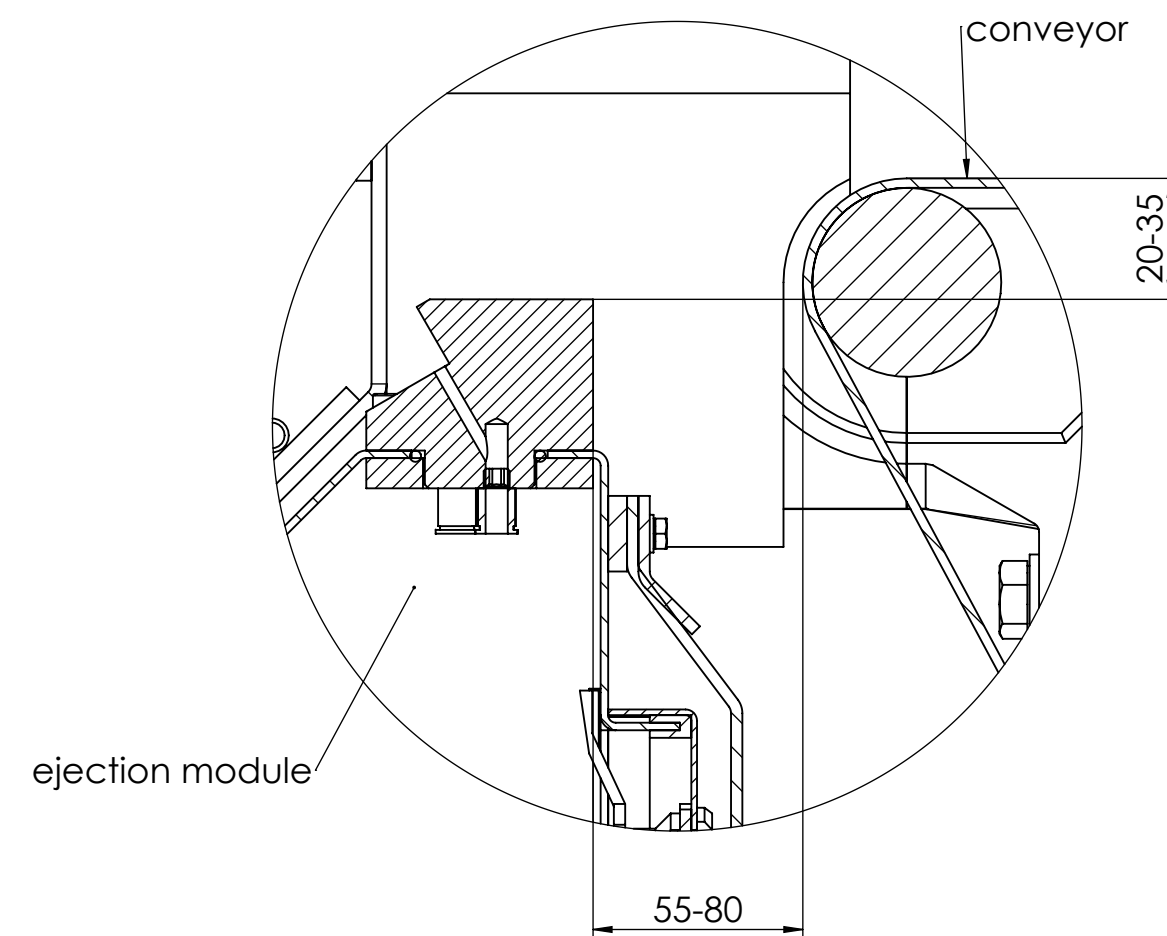

center of gravity
design changes reserved

MAIN MEASUREMENTS

UNLESS OTHERWISE NOTED (DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN PARENTHESES ARE IN INCHES) DIMENSIONS IN PARENTHESES ARE IN INCHES	DATE	NAME	SURFACE FINISH
	30.08.2018	AKHMET	INTERNAL
	24.05.2019	ANNEKANE	EXTERNAL
	24.05.2019	ANNEKANE	EXTERNAL
DESCRIPTION		X-TRACT[XRT][X4-1200][B][V01].	
GENERAL TOLERANCE DIM ISO 13715			
SURFACE FINISH DIM ISO 1302 Ra 1.6 (10)			
			
			
SORTING SOLUTIONS		PART REV.	NEW X-TRACT[XRT][X4-1200][B][V01]

CONFIDENTIAL © TOMRA SORTING SOLUTIONS. ACCORDING TO ISO 14001:2015
PRINTED DRAWINGS SHOULD NOT BE SCALED

